Product technical sheet

FITNESS 1121







14+


< 140 kg

16,0 m2

Product data


Length	205 cm
Width	150 cm
Total height	125 cm
Age group	14+ years
Maximum weight of user	140 kg
Safety zone	16,0 m2
Free fall height	90 cm
In accordance with norm EN	16630:2015
Weight of the heaviest part	155 kg
Dimensions of the largest part	150x150x36 cm
Availability of spare parts	YES
Installation time	2 h
Color options	

Data is subject to change without prior notice.

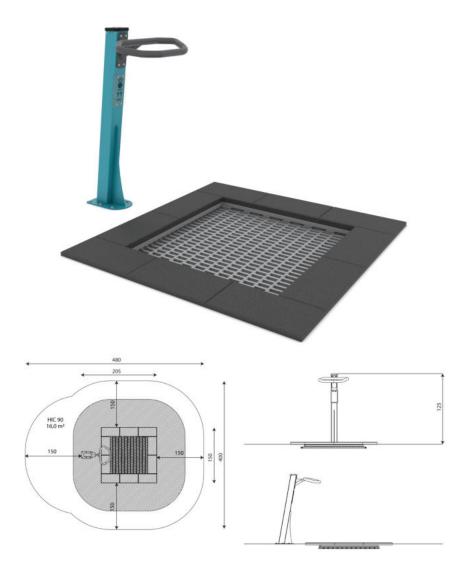









VAT: 534-250-14-46

PHONE: +48 42 203 24 99 ext. 26

M: +48 793 404 991




Material specification



Powder galvanized and powder-coated or stainless steel construction of 100 x 100 mm profile, dulrable end caps on the top of the structure made of plastic,

Powder galvanized and powder coated steel



The construction made of hot-dip galvanized mounting on durable galvanized springs. The without edging.

Polycarbonate exercise instructions


conditions.

information plate and phone holder made

of durable HDPE plate, resistant to weather



Stainless steel screws and/or screws covered with plastic caps,



steel. Jumping mat made of polyamide lamellas and stainless steel ropes. Mat edges covered with SBR rubber edging or



Vinci Group Sp. z o.o. Seminaryjna 9 Street 99-400 Łowicz

or stainless steel bars.

VAT: 534-250-14-46

PHONE: +48 42 203 24 99 ext. 26

M: +48 793 404 991

Additional information

- equipment adapted for the disabled; device intended for public outdoor gyms;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

Guarantee

- 30 year guarantee Structural strength of steel and stainless steel components
- 15 year guarantee Structural failure of steel and stainless steel, for dynamic equipment
- 10 year guarantee Structural failure of high density polyethylene and high pressure laminates components
- 5 year guarantee Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card



biuro@vinci-play.com info@vinci-play.com www.vinci-play.com

Amount of safe surface corresponding with free fall height:

HIC 90

16,0 m²

Data is subject to change without prior notice.

Surfaces according to EN 16630:2015

	Description (mm)	Layer thickness (cm)	Maximum fall height (cm)
Concrete / stone / bituminous surfaces (A, B, C)	-	-	≤100
outer soil layer (A,B,C)	-	-	≤120
Turf (A,B,C)	-	-	≤150
bark (A,C)	Particle size from 20 to	30	≤200
Dark (A,C)	80	40	≤300
wood shavings/cuttings (A, C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand (A,C)	Particle size from 0,2 to	30	≤200
2 mn	2 mm	40	≤300
gravel (A,C)	Particle size from 2 to 8	30	≤200
		40	≤300
attested synthetic (A, B, C)	Tested according to EN 1177		90

