




## Product technical sheet

# MAXX 2600

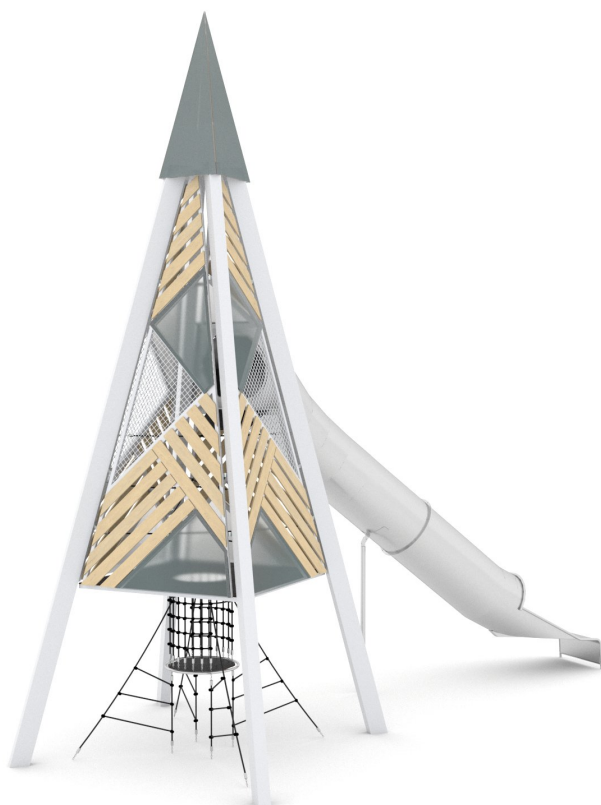

4 - 14 years



18 kids



45,3 m<sup>2</sup>



## Material specification

- Hot-dip galvanized and powder coated construction of 200 x 120 mm profile,
- Platforms made of durable anti-slip and waterproof HPL plate,
- Transparent polycarbonate panels with a weather-resistant print,
- Covers made of hot-dip galvanized and powder coated steel mesh,
- Side panels made of Robinia - very durable acacia wood without sharp edges, resistant to weather conditions
- Stainless steel tube slide,
- Elements made of safe, certified rubber with textile reinforcement,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel screws and/or screws covered with plastic caps,



## Physical development



sliding



observation



community



climbing





**1**  
number of  
towers



**1**  
number of  
slides



**5**  
number of activity  
elements

## Product technical sheet

# MAXX 2600


### Product data

|                             |                     |
|-----------------------------|---------------------|
| Length                      | 770 cm              |
| Width                       | 380 cm              |
| Total height                | 794 cm              |
| Age group                   | 4 - 14 years        |
| Number of users             | 18 kids             |
| Safety zone                 | 45,3 m <sup>2</sup> |
| Free fall height            | 92 cm               |
| The height of the platforms | 92, 180, 325 cm     |
| tube slide platform height  | 325 cm              |
| In accordance with norm EN  | 1176-1:2017+A1:2023 |
| Availability of spare parts | YES                 |



Data is subject to change without prior notice.

### Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;

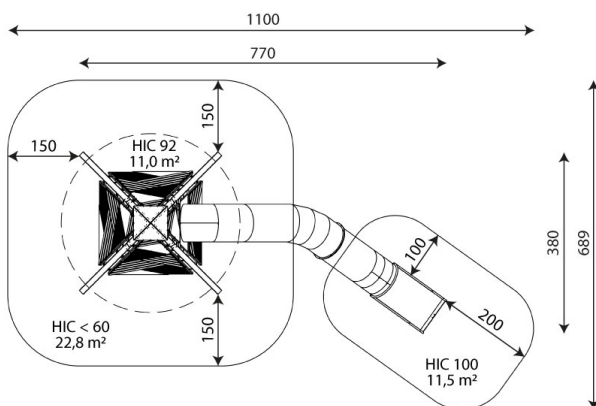

45,3 m<sup>2</sup>

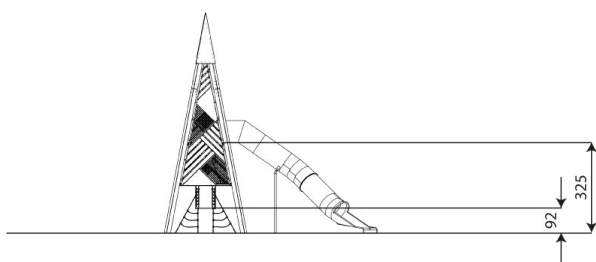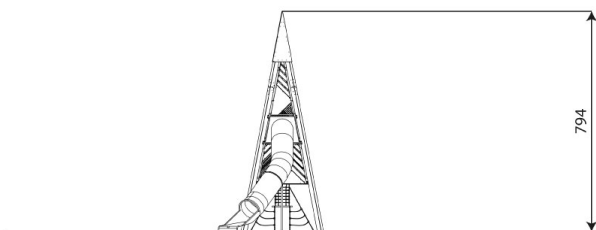

### Guarantee

**30**

30 year guarantee - Durability of steel and stainless steel structural elements

**15**

15 year guarantee - Durability of steel and stainless steel structures of mobile devices; durability of Robinia wood structural elements

**10**

10 year guarantee - Structural strength of HDPE, 100% recycled HDPE and HPL elements; structural elements made of 100% recycled material (composite)

**5**

5 year guarantee - Corrosion resistance of stainless steel and hot-dip galvanized and powder-coated steel elements, resistance to bark beetles and rotting of wooden structural elements

Detailed information in the guarantee card

**Vinci Sp. z o.o.**  
Seminaryjna 9 Street  
99-400 Łowicz

VAT: 534-265-18-84  
PHONE: +48 42 203 24 99 ext. 26  
M: +48 793 404 991



biuro@vinci-play.com  
info@vinci-play.com  
[www.vinci-play.com](http://www.vinci-play.com)

## Surfaces according to EN 1176-1:2017+A1:2023

|                                 | Description (mm)             | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | -                            | -                    | ≤100                      |
| bark (A,C)                      | Particle size from 20 to 80  | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| woodchips (A,C)                 | Particle size from 5 to 30   | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| sand or gravel (A,C)            | Particle size from 0,25 to 8 | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| synthetic attested (A,B,C)      | Tested according to EN 1177  |                      | 100                       |

## Product technical sheet

# MAXX 2600

### Amount of safe surface corresponding with free fall height:

HIC <60 22,8 m<sup>2</sup>

HIC 92 11,0 m<sup>2</sup>

HIC 100 11,5 m<sup>2</sup>

Data is subject to change without prior notice.

