

## SWING ST0592



1-3/3-14



8 kids



36,0 m²

**R1**



**R2**



**R3**



**R5**



**R16**



### Material specification

- Stainless steel, hot-dip galvanized and powder coated or powder galvanized and powder coated steel construction of 80 x 80 mm profile,
- Hot-dip galvanized and powder coated or powder galvanized and powder coated or stainless steel construction elements,
- Attested, safe seats,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel swing fittings,
- Stainless steel screws and/or screws covered with plastic caps,
- Safe end caps on the top of the bar, made of durable HDPE plate, resistant to weather conditions,



**Facilitating disability**



easy access



integration



**Physical development**



rest






rocking



## Product technical sheet

# SWING ST0592

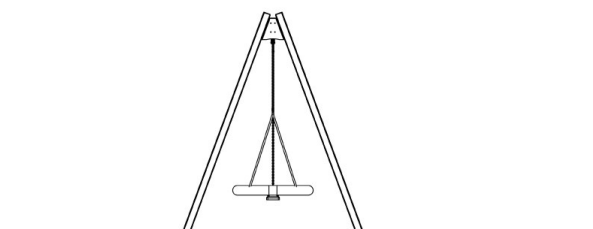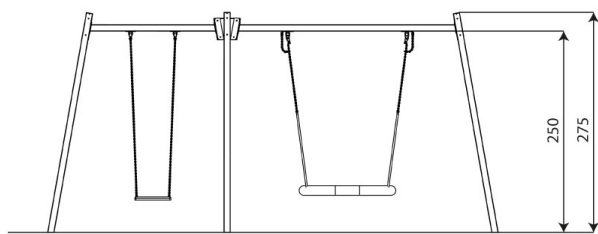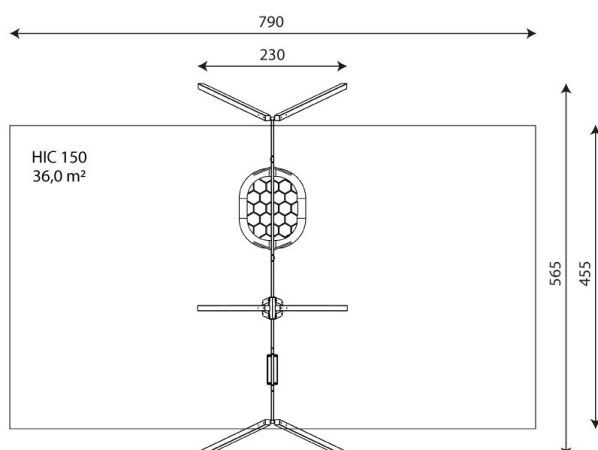

## Product data

|                                |                     |
|--------------------------------|---------------------|
| Length                         | 230 cm              |
| Width                          | 565 cm              |
| Total height                   | 275 cm              |
| Age group                      | 1-3/3-14 years      |
| Number of users                | 8 kids              |
| Safety zone                    | 36,0 m2             |
| Free fall height               | 150 cm              |
| In accordance with norm EN     | 1176-1:2017+A1:2023 |
| Weight of the heaviest part    | 17 kg               |
| Dimensions of the largest part | 345x8x8 cm          |
| Availability of spare parts    | YES                 |
| Installation time              | 2 h                 |

## Color options



Data is subject to change without prior notice.

## Additional information

- equipment adapted for the disabled; intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- available types of seats in the swing: R1 - flat, R2 - basket, R3 - flat belt, R5 - flat with barrier, R16 - parent-child;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

## Guarantee

**30**

30 year guarantee - Durability of steel and stainless steel structural elements

**15**

15 year guarantee - Durability of steel and stainless steel structures of mobile devices; durability of Robinia wood structural elements

**10**

10 year guarantee - Structural strength of HDPE, 100% recycled HDPE and HPL elements; structural elements made of 100% recycled material (composite)

**5**

5 year guarantee - Corrosion resistance of stainless steel and hot-dip galvanized and powder-coated steel elements, resistance to bark beetles and rotting of wooden structural elements

Detailed information in the guarantee card

**Vinci Sp. z o.o.**  
Seminarnyja 9 Street  
99-400 Łowicz

VAT: 534-265-18-84  
PHONE: +48 42 203 24 99 ext. 26  
M: +48 793 404 991



biuro@vinci-play.com  
info@vinci-play.com  
[www.vinci-play.com](http://www.vinci-play.com)

## Surfaces according to EN 1176-1:2017+A1:2023

|                                 | Description (mm)             | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | -                            | -                    | ≤100                      |
| bark (A,C)                      | Particle size from 20 to 80  | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| woodchips (A,C)                 | Particle size from 5 to 30   | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| sand or gravel (A,C)            | Particle size from 0,25 to 8 | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| synthetic attested (A,B,C)      | Tested according to EN 1177  |                      | 150                       |

## Product technical sheet

# SWING ST0592

### Amount of safe surface corresponding with free fall height:

HIC 150 36,0 m<sup>2</sup>

Data is subject to change without prior notice.

