


**Product technical sheet****SWING ST0533****3 - 12 years****1 kids****49,0 m²****Material specification**

- Hot-dip galvanized and powder coated or powder galvanized and powder coated steel construction with a diameter of 140 mm,
- Attested, safe seats,
- Stainless steel chains with rubber braid; calibrated, preventing fingers from getting stuck,
- Stainless steel swing fittings,
- Stainless steel screws and/or screws covered with plastic caps,
- Safe end caps on the top of the bar, made of durable HDPE plate, resistant to weather conditions,

**Physical development**

rocking



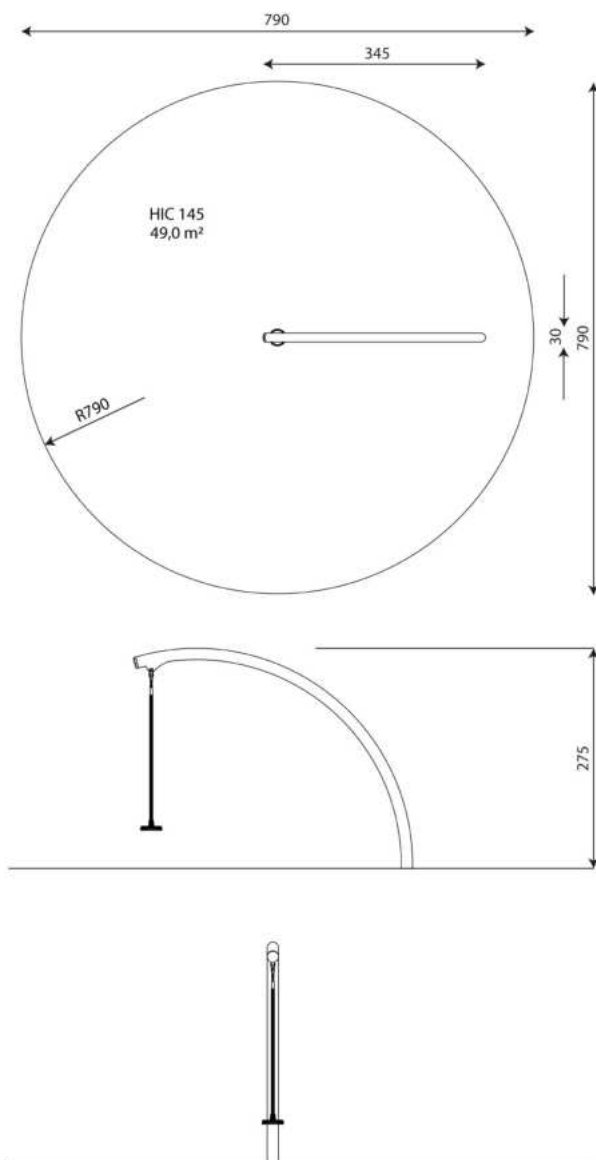

Product technical sheet

SWING ST0533

Product data

Length	345 cm
Width	30 cm
Total height	275 cm
Age group	3 - 12 years
Number of users	1 kids
Safety zone	49,0 m ²
Free fall height	145 cm
In accordance with norm EN	1176-1:2017
Weight of the heaviest part	134 kg
Dimensions of the largest part	340x270x14 cm
Availability of spare parts	YES
Installation time	1 h
Color options	

Data is subject to change without prior notice.

Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimmieing the head, fingers or any other body parts;
- anchoring on flat surface, 100 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

Guarantee

30

30 year guarantee - Structural strength of steel and stainless steel components

15

15 year guarantee - Structural failure of steel and stainless steel, for dynamic equipment

10

10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components

5

5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card



Surfaces according to EN 1176-1:2017

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		49,0

Product technical sheet

SWING ST0533

Amount of safe surface corresponding with free fall height:

HIC 145 49,0 m²

Data is subject to change without prior notice.

